



Item	Description	Qty
1	Bracket	4
2	Arm 1	1
3	Arm 2	1
4	Clip Bracket	4
5	Calibration sheet	1
6	M8x20 Bolt	8
7	M12x180 Bolt	4
8	M10x110 Bolt	4
9	M6X30 Bolt	2
10	M6 Screw Nut	6
11	M10 Screw Nut	4

Item	Description	Qty
12	φ10 Spring Washer	4
13	φ10 Flat Washer	4
14	M8 Screw Nut	8
15	φ8 Flat Washer	8
16	φ8 Spring Washer	8
17	φ6 Flat Washer	2
18	φ6 Spring Washer	2
19	M12 Screw Nut	8
20	φ12 Spring Washer	4
21	φ12 Flat Washer	4
22	Al Pipe φ16*75.5	4


Nuts tightening force

Nut type	Torques	Wrench type
M8	16-22N.m	13mm
M10	32-40N.m	17mm
M12	57-75N.m	19mm
M6	6-8N.m	10mm


Antenna installation procedure

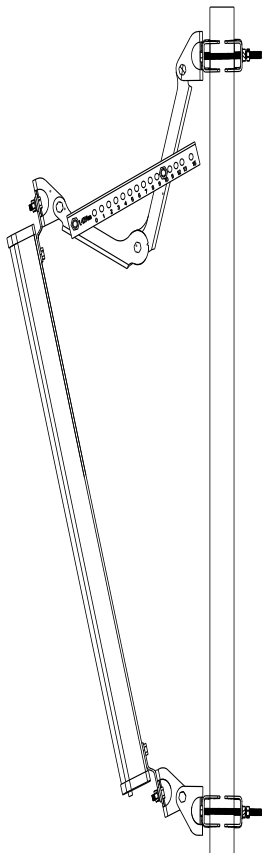


With M8X20 bolts fixing the bracket installed on the antenna top.




With M8X20 bolts fixing the bracket installed on the antenna bottom.




Fix bottom Clip brackets on mounting pipe.



Adjust the antenna angle(Calibration sheet) to 0 degrees position



Fix top Clip brackets on mounting pipe.



Adjust down-tilt angle by calibration sheet, Tightening all screw nuts.