


AISG Cable for RET Antennas

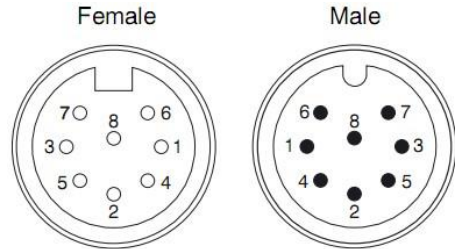

- PIN assignment according AISG:**
- 1 +13 V DC (+12 V DC nominal)
 - 2 not connected
 - 3 RS485 B
 - 4 not connected
 - 5 RS485 A
 - 6 +29 V DC (+24 V DC nominal)
 - 7 DC Return
 - 8 not connected

Specifications

Connectors	1 x 8 pin IEC 60130-9 male connector 1 x 8 pin IEC 60130-9 female connector
Construction	Shielded 3 x 20 AWG 2 x 24 AWG (twisted pair, RS485 A and B)
Protection class	IP 67 (connected)
Rated current	5 A
Temperature Range	-20°C ~ 80°C
Materials	RoHS compliant

Available Lengths

- AISG-Cab-3m
- AISG-Cab-10m
- AISG-Cab-20m
- AISG-Cab-50m